




SPHERICAL PLAIN BEARINGS



RADIAL TYPE
Metric Size

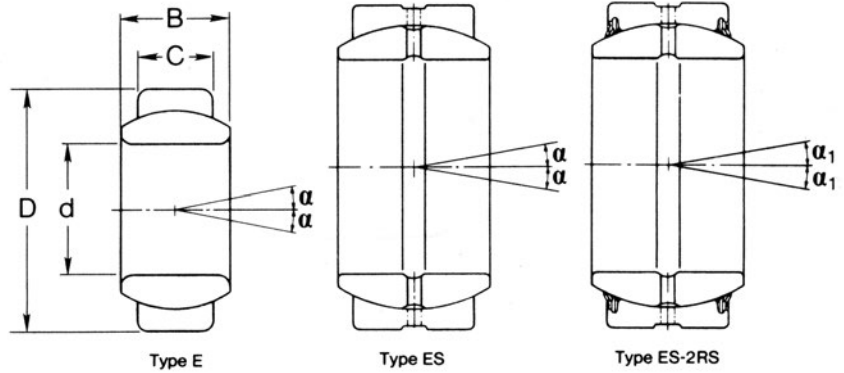


Bearing Number With Seals - 2RS	Dimensions				Angle of tilt ∞	∞ 1	Weight	
	d	D	B	C			kg	Lbs
	In. mm	In. mm	In. mm	In. mm	Degrees			
GE 6 E	0.2362 6	0.5512 14	0.2362 6	0.1575 4	13	-	0.004	0.009
GE 8 E	0.315 8	0.6299 16	0.315 8	0.1969 5	15	-	0.008	0.018
GE 10 E	0.3937 10	0.748 19	0.3543 9	0.2362 6	12	-	0.012	0.026
GE 12 E	0.4724 12	0.8661 22	0.3937 10	0.2756 7	11	-	0.017	0.037
GE 15 ES	0.5906 15	1.0236 26	0.4724 12	0.3543 9	8	-	0.032	0.07
GE 15 ES-2RS	0.5906 15	1.0236 26	0.4724 12	0.3543 9	8	-	0.032	0.07
GE 17 ES	0.6693 17	1.1811 30	0.5512 14	0.3937 10	10	-	0.05	0.11
GE 17 ES-2RS	0.6693 17	1.1811 30	0.5512 14	0.3937 10	10	-	0.05	0.11
GE 20 ES	0.7874 20	1.378 35	0.6299 16	0.4724 12	9	6	0.065	0.14
GE 20 ES-2RS	0.7874 20	1.378 35	0.6299 16	0.4724 12	9	6	0.065	0.14
GE 25 ES	0.9843 25	1.6535 42	0.7874 20	0.6299 16	7	4	0.12	0.26
GE 25 ES-2RS	0.9843 25	1.6535 42	0.7874 20	0.6299 16	7	4	0.12	0.26
GE 30 ES	1.1812 30	1.8504 47	0.8661 22	0.7087 18	6	4	0.16	0.35
GE 30 ES-2RS	1.1812 30	1.8504 47	0.8661 22	0.7087 18	6	4	0.16	0.35
GE 35 ES	1.378 35	2.1653 55	0.9843 25	0.7874 20	6	4	0.23	0.51
GE 35 ES-2RS	1.378 35	2.1653 55	0.9843 25	0.7874 20	6	4	0.23	0.51
GE 40 ES	1.5748 40	2.4409 62	1.1024 28	0.8661 22	7	4	0.32	0.70
GE 40 ES-2RS	1.5748 40	2.4409 62	1.1024 28	0.8661 22	7	4	0.32	0.70
GE 45 ES	1.7717 45	2.6772 68	1.2598 32	0.9843 25	7	4	0.46	1.01
GE 45 ES-2RS	1.7717 45	2.6772 68	1.2598 32	0.9843 25	7	4	0.46	1.01
GE 50 ES	1.9688 50	2.9528 75	1.378 35	1.1024 28	6	4	0.56	1.23
GE 50 ES-2RS	1.9688 50	2.9528 75	1.378 35	1.1024 28	6	4	0.56	1.23
GE 60 ES	2.3622 60	3.5433 90	1.7323 44	1.4173 36	6	3	1.10	2.42
GE 60 ES-2RS	2.3622 60	3.5433 90	1.7323 44	1.4173 36	6	3	1.10	2.42



SPHERICAL PLAIN BEARINGS



RADIAL TYPE
Metric Size

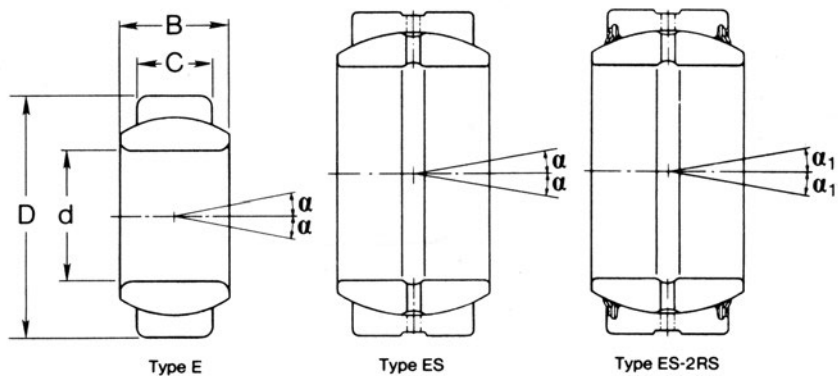

Bearing Number With Seals - 2RS	Dimensions				Angle of tilt ∞ Degrees	∞ 1	Weight	
	d In. mm	D In. mm	B In. mm	C In. mm			kg	Lbs
GE 70 ES	2.7559 70	4.1339 105	1.9291 49	1.5748 40	6	4	1.55	3.42
GE 70 ES-2RS	2.7559 70	4.1339 105	1.9291 49	1.5748 40	6	4	1.55	3.42
GE 80 ES	3.1496 80	4.7245 120	2.1654 55	1.7717 45	6	4	2.30	5.07
GE 80 ES-2RS	3.1496 80	4.7245 120	2.1654 55	1.7717 45	6	4	2.30	5.07
GE 90 ES	3.5433 90	5.1181 130	2.3622 60	1.9688 50	5	3	2.75	6.06
GE 90 ES-2RS	3.5433 90	5.1181 130	2.3622 60	1.9688 50	5	3	2.75	6.06
GE 100 ES	3.9370 100	5.9055 150	2.7559 70	2.1564 55	7	-	4.45	9.81
GE 100 ES-2RS	3.9370 100	5.9055 150	2.7559 70	2.1564 55	7	-	4.45	9.81
GE 110 ES	4.3307 110	6.2992 160	2.7559 70	2.1564 55	6	-	4.82	10.63
GE 110 ES-2RS	4.3307 110	6.2992 160	2.7559 70	2.1564 55	6	-	4.82	10.63
GE 120 ES	4.7244 120	7.0866 180	3.6465 85	2.7559 70	6	-	8.05	17.75
GE 120 ES-2RS	4.7244 120	7.0866 180	3.6465 85	2.7559 70	6	-	8.05	17.75
GE 140 ES	5.5118 140	8.2677 210	3.5433 90	2.7559 70	7	-	11.02	24.3
GE 140 ES-2RS	5.5118 140	8.2677 210	3.5433 90	2.7559 70	7	-	11.02	24.3
GE 160 ES	6.2992 160	9.0551 230	4.1339 105	3.1496 80	8	-	14.01	30.89
GE 160 ES-2RS	6.2992 160	9.0551 230	4.1339 105	3.1496 80	8	-	14.01	30.89
GE 180 ES	7.0866 180	10.2362 260	4.1339 105	3.1496 80	6	-	18.65	41.12
GE 180 ES-2RS	7.0866 180	10.2362 260	4.1339 105	3.1496 80	6	-	18.65	41.12